


Installation Instruction

Item No: 8102-3H/8103-3H

1. Carefully unpack and take out the parts as picture shown.
2. Install the tube(G)onto nipple(H),then slide the cap(D)onto nipple(E),and secure it with hex nut(C),then thread fixture loop(A)on;
3. Hang the side rod(F)onto cap(D)& clip of the frame(Q)and fabric shade(P)using cap nut(B),(I)on;
4. Thread nipple with hex nut(L)into coupling(K),then slide the tube(M),ring(N),rubber washer(O),plate(R),steel washer(S)onto nipple with hex nut(L),and secure them with hex nut(T);
5. Slide the cap(U)onto nipple with hex nut(L),and secure it with finial(V);

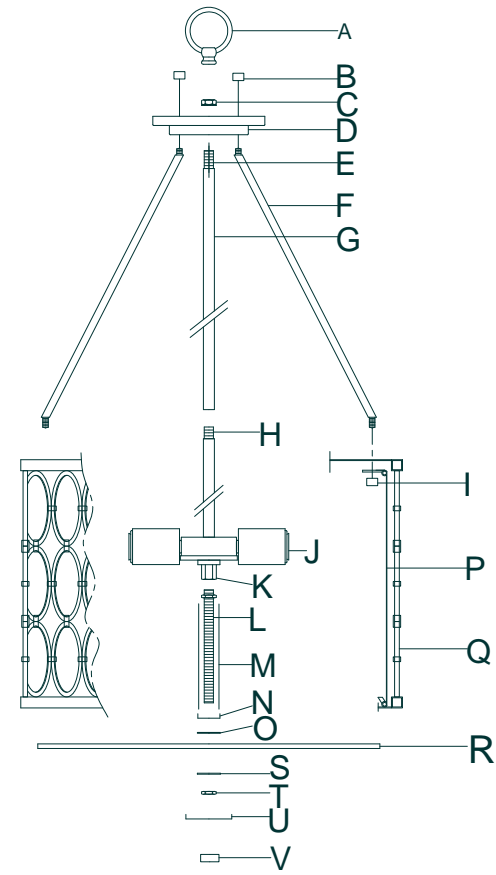

Important Safety Instruction

This portable lamp has a polarized plug (One blade is wider than the other) as a safety feature to reduce the risk of the electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit in the outlet, reverse the plug. If it still does not fit, consult a qualified electrician. Never use an extension cord unless the plug can be fully inserted. Do not alter the plug.

Note: 120V/60W

WARNING ! – To reduce the risk of fire ,electric shock, or personal injury:

- Turn off / unplug lamp and allow to cool before replacing bulb.
- Do not touch bulb when fixture is turned on
- Do not look directly at lighted bulb
- keep materials that burn easily away from lighted bulb

CLEANING:

Use only soft cloth to dust and clean fixture. Never use chemicals or abrasive cleaners as it may damage finish

\★ Keep this instruction for future reference