

FIXED FIXTURE INSTALLATION INSTRUCTIONS: Model 8854-2W

NOTE: We advise contacting a qualified electrician for installation.


WARNING: SHUT OFF THE POWER SUPPLY AT FUSE OR CIRCUIT BREAKER BOX.

MOUNTING THE FIXTURE

1. **Shut off the power supply at the fuse box or circuit breaker box.** Remove the old fixture, including the universal mounting plate.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. The bag includes acrylic bead strings as follows:
A (12pcs), B (1pc), as shown on the right.
4. Follow wire instructions carefully (see fig.1)
5. Use hole plug (K) to cover wire hole in the backplate (C).
6. Thread 2 mounting screws through the mounting screw holes from the back of the universal mounting plate.
7. Attach universal mounting plate to the outlet box using 2 outlet box screws. The side of the universal mounting plate marked "GND" must face out.
8. Follow the ground wiring instructions carefully. (See Fig.2)
9. Please adjust the distance of the arms to a proper position.
10. Attach the fixture body (C) onto the outlet box, install the screws (G) through 2 holes of the body (C) and tighten with 2 screws (G) into the mounting plate.
11. Hook acrylic bead string (B) on the ring of each arm.
12. Hook acrylic bead string (A) on the disk (F) and ring of each arm.
13. Insert the socket sleeve on the socket (E) and install the light bulb (**not included**) into the socket (E).


DO NOT EXCEED THE MAXMUM WATTAGE RATING!

Fig.1

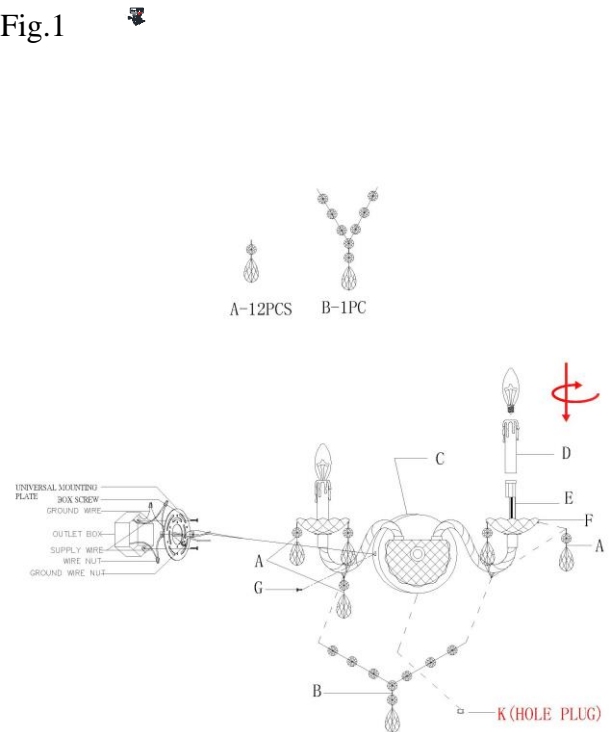

NOTE: 120V, MAX 60WATT TYPE B

Fig.2

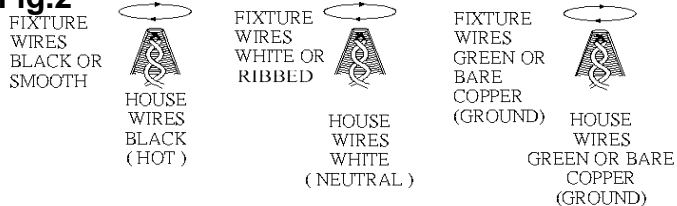

WARNING! – To reduce the risk of fire, electric shock, or personal injury:

- Turn off/unplug lamp and allow to cool before replacing bulb.
- Do not touch bulb when fixture is turned on.
- Do not look directly at lighted bulb.
- Keep materials that burn easily away from lighted bulb.

CLEANING:

Use only soft cloth to dust and clean fixture.
Never use chemicals or abrasive cleaners as it may damage finish.

★ Keep this instruction for future reference

CONNECTING THE WIRE (See fig.2)

1. Take the black wire from the ceiling outlet box and the smooth wire leg from the fixture and twist bare ends together. Twist wire connector onto end of wire until snug.
2. Repeat same process with white junction box wire and ribbed wire leg of fixture wire. **NOTE:** Twist wire together in the same direction, then twist the wire connector onto wire.
3. If your outlet box has a grounding wire (Green or bare copper). Attach this wire and the bare copper wire from the fixture together as step 1. If outlet box has no ground wire attach the bare copper fixture wire to the green ground screw on the cross bar.
4. Tuck these wires connectors neatly into the ceiling outlet box and raise the collar ring (L) and thread onto collar loop (J) protruding through canopy.